

XP-10G-Dxx-80

10Gb/s DWDM XFP Transceiver Hot Pluggable, Duplex LC, +3.3V & +5V, 100GHz ITU Grid C Band, EML/APD Single mode, 80km, 0~70°C

XP-10G-Dxx-80 10Gb/s DWDM XFP transceiver, inter-converting the 10Gb/s serial electrical data stream with the 10Gb/s optical signal, complies with XFP Multi-Source Agreement (MSA) Specification. It provides Digital diagnostics functions via a 2-wire serial interface. It supports the optical link length of 80km on single mode fiber.

■ Features:

- ◇ Supports 9.95 to 11.3Gb/s bit rates
- ◇ Hot pluggable 30 pin connector
- ◇ Duplex LC connector
- ◇ 100GHz ITU Grid, C Band
- ◇ DWDM EML transmitter, APD photo-detector
- ◇ SMF links up to 80km
- ◇ 2-wire interface for management and diagnostic monitor
- ◇ Compliant with XFP MSA
- ◇ XFI electrical interface with AC coupling
- ◇ Power supply voltages : +3.3V, +5V
- ◇ Temperature range 0°C to 70°C
- ◇ Power dissipation: <3.5W
- ◇ RoHS Compliant Part

■ Applications:

- ◇ 10GBASE-ZR/ZW Ethernet
- ◇ SONET OC-192 / SDH
- ◇ 10G Fibre channel
- ◇ DWDM Networks

■ Ordering Information:

Part Number	Data Rate	Distance	Central Wavelength (nm)	Frequency (THZ)	Laser	Fiber	DDM	Connector
XP-10G-D61-80	10Gb/s	80km	1528.77	196.1	EML/APD	SM	Yes	Duplex LC
XP-10G-D60-80	10Gb/s	80km	1529.55	196.0	EML/APD	SM	Yes	Duplex LC
XP-10G-D59-80	10Gb/s	80km	1530.33	195.9	EML/APD	SM	Yes	Duplex LC
XP-10G-D58-80	10Gb/s	80km	1531.12	195.8	EML/APD	SM	Yes	Duplex LC
XP-10G-D57-80	10Gb/s	80km	1531.90	195.7	EML/APD	SM	Yes	Duplex LC
XP-10G-D56-80	10Gb/s	80km	1532.68	195.6	EML/APD	SM	Yes	Duplex LC
XP-10G-D55-80	10Gb/s	80km	1533.47	195.5	EML/APD	SM	Yes	Duplex LC
XP-10G-D54-80	10Gb/s	80km	1534.25	195.4	EML/APD	SM	Yes	Duplex LC

Web: <http://www.huigooptics.com>

E-mail: sales@huigooptics.com

XP-10G-D53-80	10Gb/s	80km	1535.04	195.3	EML/APD	SM	Yes	Duplex LC
XP-10G-D52-80	10Gb/s	80km	1535.82	195.2	EML/APD	SM	Yes	Duplex LC
XP-10G-D51-80	10Gb/s	80km	1536.61	195.1	EML/APD	SM	Yes	Duplex LC
XP-10G-D50-80	10Gb/s	80km	1537.40	195.0	EML/APD	SM	Yes	Duplex LC
XP-10G-D49-80	10Gb/s	80km	1538.19	194.9	EML/APD	SM	Yes	Duplex LC
XP-10G-D48-80	10Gb/s	80km	1538.98	194.8	EML/APD	SM	Yes	Duplex LC
XP-10G-D47-80	10Gb/s	80km	1539.77	194.7	EML/APD	SM	Yes	Duplex LC
XP-10G-D46-80	10Gb/s	80km	1540.56	194.6	EML/APD	SM	Yes	Duplex LC
XP-10G-D45-80	10Gb/s	80km	1541.35	194.5	EML/APD	SM	Yes	Duplex LC
XP-10G-D44-80	10Gb/s	80km	1542.14	194.4	EML/APD	SM	Yes	Duplex LC
XP-10G-D43-80	10Gb/s	80km	1542.94	194.3	EML/APD	SM	Yes	Duplex LC
XP-10G-D42-80	10Gb/s	80km	1543.73	194.2	EML/APD	SM	Yes	Duplex LC
XP-10G-D41-80	10Gb/s	80km	1544.53	194.1	EML/APD	SM	Yes	Duplex LC
XP-10G-D40-80	10Gb/s	80km	1545.32	194.0	EML/APD	SM	Yes	Duplex LC
XP-10G-D39-80	10Gb/s	80km	1546.12	193.9	EML/APD	SM	Yes	Duplex LC
XP-10G-D38-80	10Gb/s	80km	1546.92	193.8	EML/APD	SM	Yes	Duplex LC
XP-10G-D37-80	10Gb/s	80km	1547.72	193.7	EML/APD	SM	Yes	Duplex LC
XP-10G-D36-80	10Gb/s	80km	1548.51	193.6	EML/APD	SM	Yes	Duplex LC
XP-10G-D35-80	10Gb/s	80km	1549.32	193.5	EML/APD	SM	Yes	Duplex LC
XP-10G-D34-80	10Gb/s	80km	1550.12	193.4	EML/APD	SM	Yes	Duplex LC
XP-10G-D33-80	10Gb/s	80km	1550.92	193.3	EML/APD	SM	Yes	Duplex LC
XP-10G-D32-80	10Gb/s	80km	1551.72	193.2	EML/APD	SM	Yes	Duplex LC
XP-10G-D31-80	10Gb/s	80km	1552.52	193.1	EML/APD	SM	Yes	Duplex LC
XP-10G-D30-80	10Gb/s	80km	1553.33	193.0	EML/APD	SM	Yes	Duplex LC
XP-10G-D29-80	10Gb/s	80km	1554.13	192.9	EML/APD	SM	Yes	Duplex LC
XP-10G-D28-80	10Gb/s	80km	1554.94	192.8	EML/APD	SM	Yes	Duplex LC
XP-10G-D27-80	10Gb/s	80km	1555.75	192.7	EML/APD	SM	Yes	Duplex LC
XP-10G-D26-80	10Gb/s	80km	1556.55	192.6	EML/APD	SM	Yes	Duplex LC
XP-10G-D25-80	10Gb/s	80km	1557.36	192.5	EML/APD	SM	Yes	Duplex LC
XP-10G-D24-80	10Gb/s	80km	1558.17	192.4	EML/APD	SM	Yes	Duplex LC
XP-10G-D23-80	10Gb/s	80km	1558.98	192.3	EML/APD	SM	Yes	Duplex LC
XP-10G-D22-80	10Gb/s	80km	1559.79	192.2	EML/APD	SM	Yes	Duplex LC
XP-10G-D21-80	10Gb/s	80km	1560.61	192.1	EML/APD	SM	Yes	Duplex LC
XP-10G-D20-80	10Gb/s	80km	1561.42	192.0	EML/APD	SM	Yes	Duplex LC
XP-10G-D19-80	10Gb/s	80km	1562.23	191.9	EML/APD	SM	Yes	Duplex LC
XP-10G-D18-80	10Gb/s	80km	1563.05	191.8	EML/APD	SM	Yes	Duplex LC
XP-10G-D17-80	10Gb/s	80km	1563.86	191.7	EML/APD	SM	Yes	Duplex LC

➤ Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	T _{ST}	-40	+85	°C
Case Operating Temperature	T _{IP}	0	+70	°C
Supply Voltage 1	V _{CC3}	-0.5	+4.0	V
Supply Voltage 2	V _{CC5}	-0.5	+6.0	V

➤ Electrical Characteristics (T_{OP} = 0 to 70 °C)

Parameter	Symbol	Min	Typ	Max	Unit	Note	
Supply Voltage 1	V _{CC5}	4.75		5.25	V		
Supply Voltage 2	V _{CC3}	3.13		3.45	V		
Supply Current – V _{CC5} supply	I _{CC5}			250	mA		
Supply Current – V _{CC3} supply	I _{CC3}			500	mA		
Module total power	P			3.5	W		
Transmitter							
Input differential impedance	R _{in}		100		Ω	1	
Differential data input swing	V _{in,pp}	150		820	mV		
Transmit Disable Voltage	V _D	2.0		V _{CC}	V		
Transmit Enable Voltage	V _{EN}	GND		GND+ 0.8	V		
Transmit Disable Assert Time	T _{off}			100	ms		
Tx Enable Assert Time	T _{on}			100	ms		
Receiver							
Differential data output swing	V _{out,pp}	300	500	850	mV		
Data output rise time	t _r			35	ps	2	
Data output fall time	t _f			35	ps	2	
LOS Fault	V _{LOS fault}	V _{CC} – 0.5		V _{CCHOST}	V	3	
LOS Normal	V _{LOS norm}	GND		GND+0.5	V	3	
Power Supply Rejection	PSR	See Note 4 below					4

Notes: 1. After internal AC coupling.

2. 20 – 80 %

3. Loss of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

4. Per Section 2.7.1. in the XFP MSA Specification.

➤ Optical Parameters (T_{OP} = 0 to 70°C)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Operating Data Rate	BR	9.95		11.3	Gb/s	
Bit Error Rate	BER			10 ⁻¹²		
Maximum Launch Power	P _{MAX}	0		+5	dBm	1
Optical Wavelength-End Of Life	λ	X-100	X	X+100	pm	
Optical Wavelength-Beginning Of Life	λ	X-25	X	X+25	pm	


Optical Extinction Ratio	ER	8.2			dB	
Spectral Width@-20dB	$\Delta\lambda$			1	nm	
Sidemode Supression ratio	SSRmin	30			dB	
Rise/Fall Time (20%~80%)	Tr/Tf			35	ps	
Average Launch power of OFF Transmitter	P _{OFF}			-30	dBm	
Tx Jitter	T _{xj}	Compliant with each standard requirements				
Optical Eye Mask		IEEE802.3ae				2
Receiver						
Operating Date Rate	BR	9.95		11.3	Gb/s	
Receiver Sensitivity	Sen			-23	dBm	2
Maximum Input Power	P _{MAX}	-7			dBm	2
Optical Center Wavelength	λ_C	1260		1600	nm	
Receiver Reflectance	R _{rx}			-27	dB	
LOS De-Assert	LOS _D			-24	dBm	
LOS Assert	LOS _A	-34			dBm	
LOS Hysteresis	LOS _H	0.5		5	dB	

Notes: 1. The optical power is launched into SMF.


2. Measured with a PRBS 231-1 test pattern @10.3125Gbps BER<10⁻¹².

➤ Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

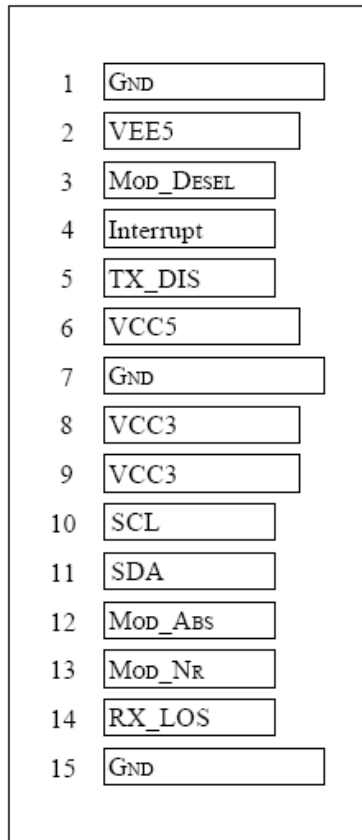

Bottom of Board
(As view through top of board)

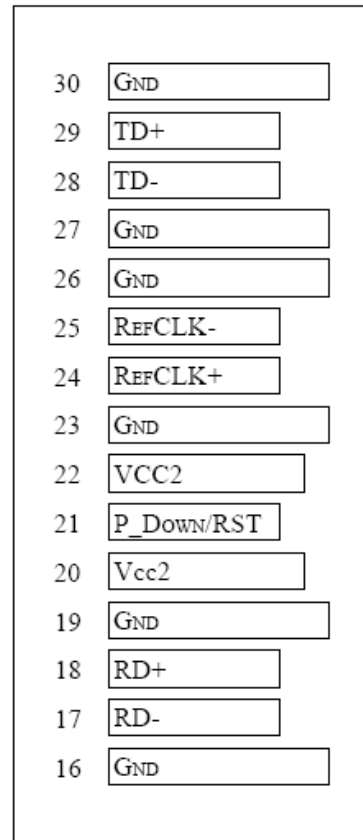

Top of Board

> Pin Function Definitions

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTTL-I	Mod-Desel	Module De-select; When held low allows the module to respond to 2-wire serial interface commands	
4	LVTTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which can be read over the serial 2-wire interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTTL- I/O	SDA	Serial 2-wire interface data line	2
12	LVTTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in the module.	2
13	LVTTTL-O	Mod_NR	Module Not Ready;	2

14	LVTTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down initiates a module reset	
			Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board – Not required	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Note: 1. Module circuit ground is isolated from module chassis ground within the module.

2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.45V.

3. A Reference Clock input is not required.

➤ Digital Diagnostic Functions

As defined by the XFP MSA 1, SH's XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:


- ✓ Transceiver temperature
- ✓ Laser bias current
- ✓ Transmitted optical power
- ✓ Received optical power
- ✓ Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.


The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end

of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.


For more detailed information including memory map definitions, please see the XFP MSA Specification.

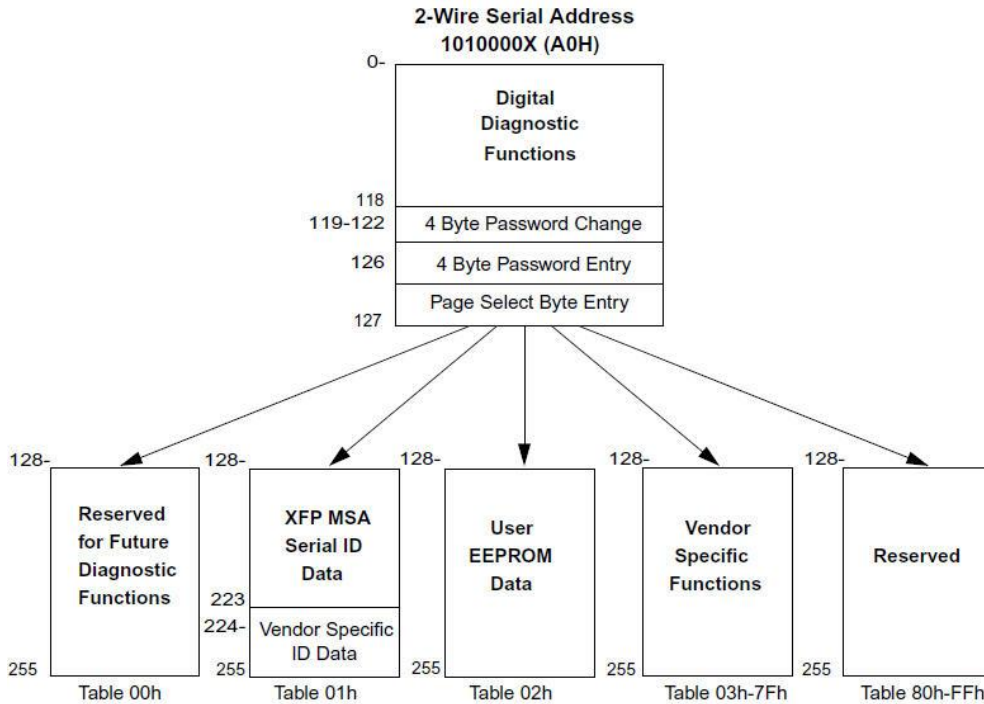

➤ **Recommended Circuit**

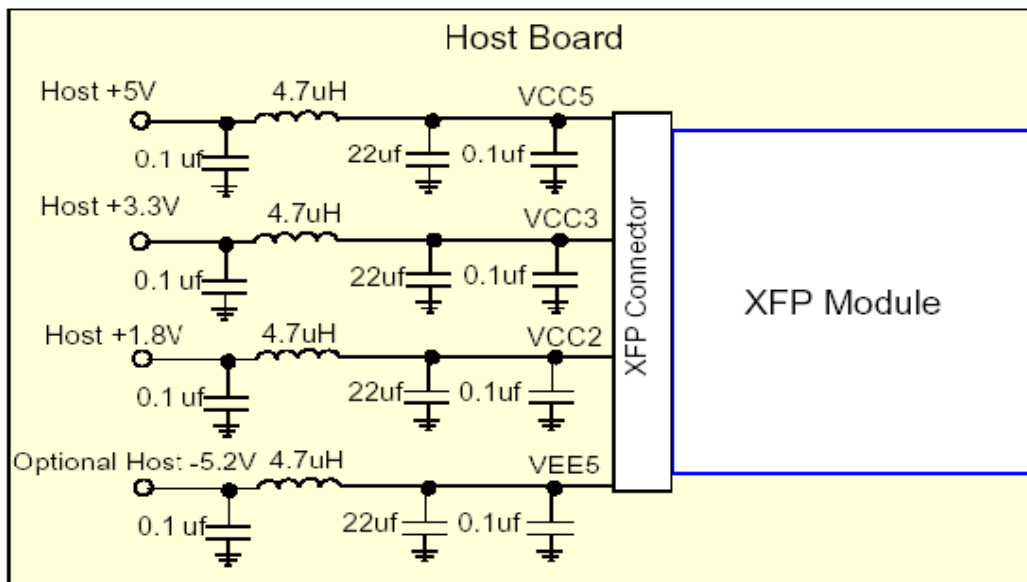


Recommended Host Board Power Supply Circuit

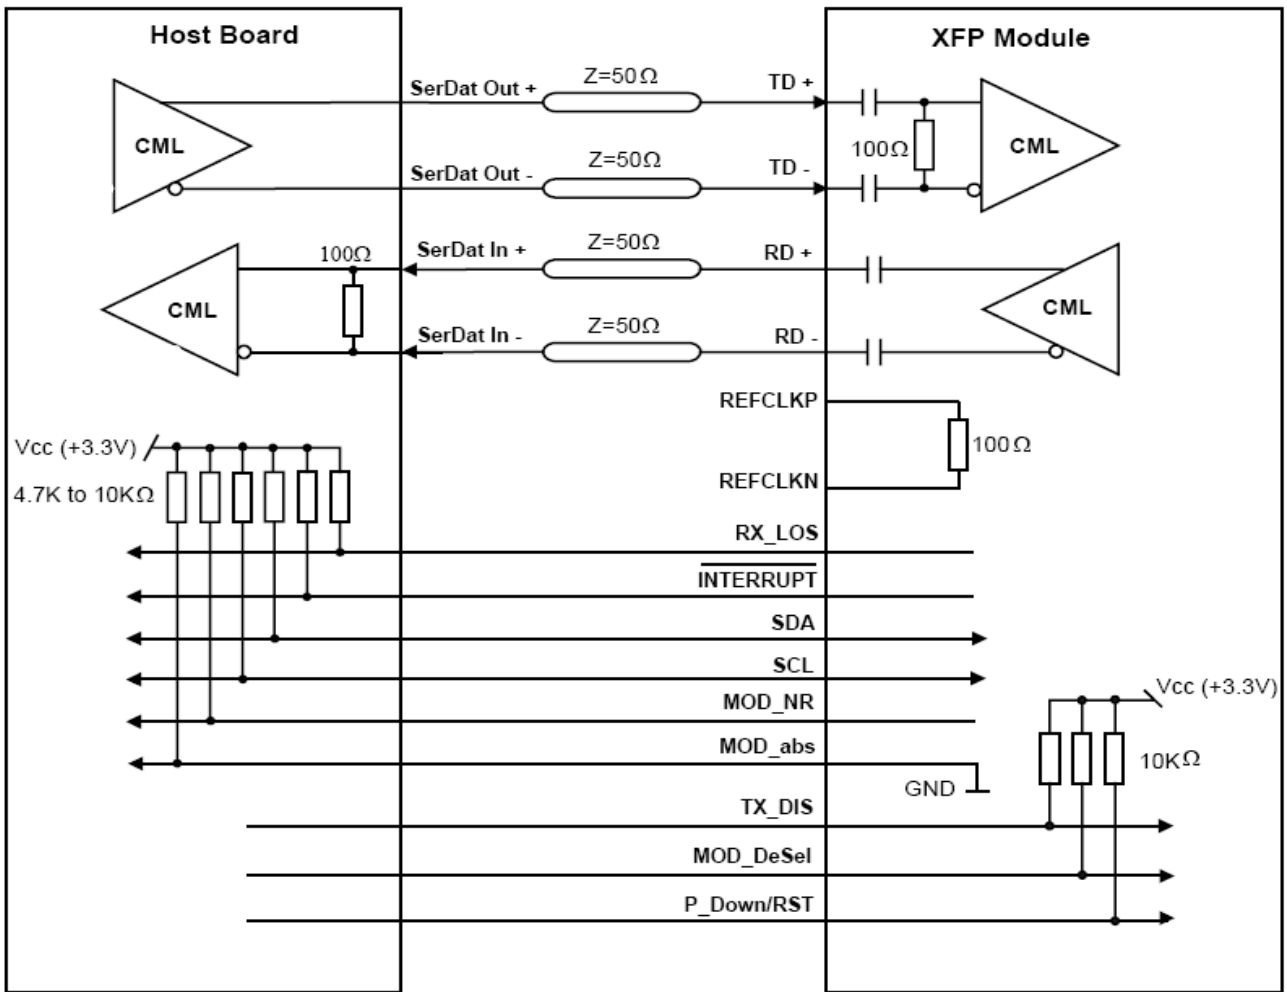

Recommended High-speed Interface Circuit

➤ Mechanical Dimensions

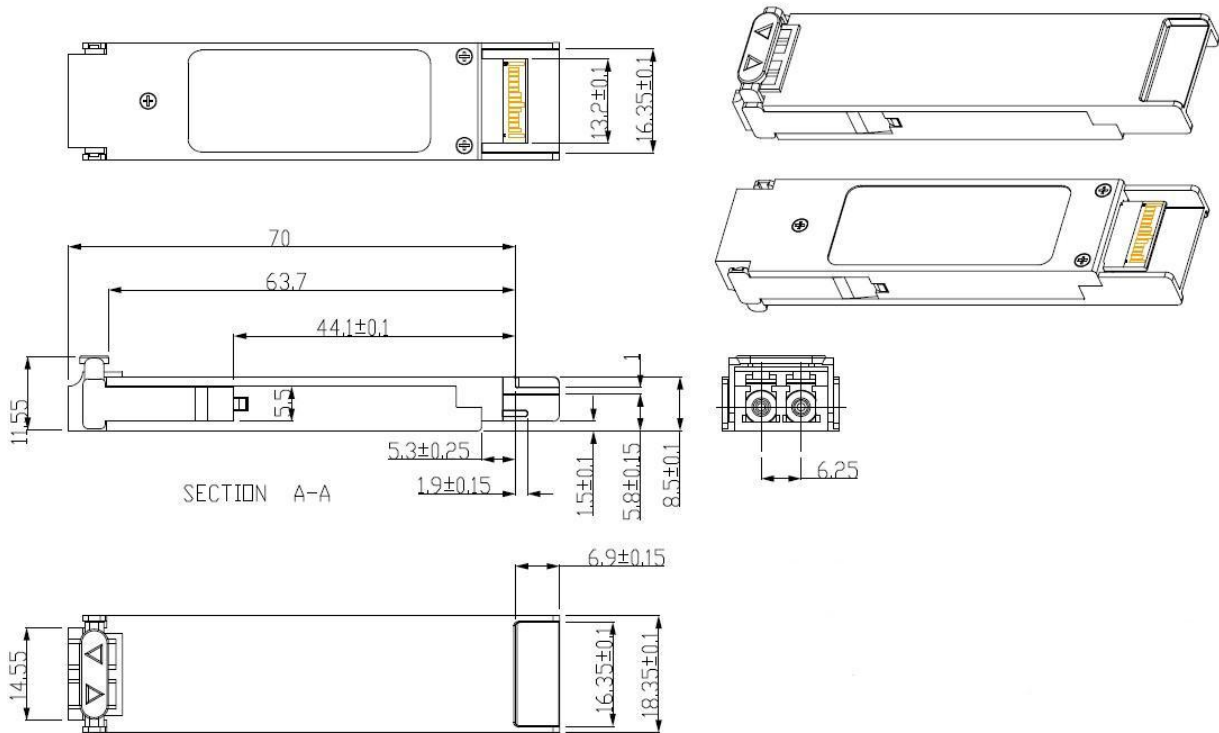

HuiGoo Optic Co., Limited

Add: 8 Floor ,Jinhua Building ,Longhua New Street ,Shenzhen , China

E-mail: sales@huigooptical.com

Web: <http://www.huigooptical.com>