

## 产 品 规 格 书

### Product Specification Sheet

**RoHS Compliant 10Gbps 80km DWDM XFP Optical Transceiver**



HuiGoo Optic Co., Limited

8th floor, Jinhua Building , Longhua New Street , Shenzhen , China

E-mail: [sales@huigooptic.com](mailto:sales@huigooptic.com)

Web: <http://www.huigooptic.com>

## PRODUCT FEATURES

- Data rate from 9.95Gbps to 11.1Gbps
- Wavelength selectable to C-band ITU-T grid wavelengths
- Suitable for use in 100GHz channel spacing DWDM systems
- link length up to 80km
- Cooled EML and APD receiver
- XFP MSA Rev 4.5 Compliant
- Very low EMI and excellent ESD protection
- High transmission margin
- +3.3V single power supply
- Below <2W power consumption
- Temperature range 0°C to 70°C

## APPLICATIONS

- SONET OC-192&SDH STM 64
- CWDM 80km 10G Fiber Channel
- DWDM Networks

## PRODUCT DESCRIPTIONS

HuiGoo XDXX1XL-CD80 is DWDM XFP Transceiver exhibits excellent wavelength stability, supporting operation at 100GHz channel, cost effective module. It is designed for 10G DWDM SDH, 10GBASE-ZR and 10G Fiber- Channel applications.

The transceiver consists of two sections: The transmitter section incorporates a cooled EML laser. And the receiver section consists of a APD photodiode integrated with a TIA. All modules satisfy class I laser safety requirements.

The DWDM XFP transceiver provides an enhanced monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage.


## PRODUCT SELECTION

### C-band $\lambda_c$ Wavelength Guide Pin Descriptions

Channl#	Product Code	Frequency (THz)	Cent Wavelength (nm)
17	XD171XL-CD80	191.7	1563.86
18	XD181XL-CD80	191.8	1563.05
19	XD191XL-CD80	191.9	1562.23
20	XD201XL-CD80	192.0	1561.42
21	XD211XL-CD80	192.1	1560.61
22	XD221XL-CD80	192.2	1559.79
23	XD231XL-CD80	192.3	1558.98
24	XD241XL-CD80	192.4	1558.17
25	XD251XL-CD80	192.5	1557.36
26	XD261XL-CD80	192.6	1556.55
27	XD271XL-CD80	192.7	1555.75
28	XD281XL-CD80	192.8	1554.94
29	XD291XL-CD80	192.9	1554.13
30	XD301XL-CD80	193.0	1553.33
31	XD311XL-CD80	193.1	1552.52
32	XD321XL-CD80	193.2	1551.72
33	XD331XL-CD80	193.3	1550.92
34	XD341XL-CD80	193.4	1550.12
35	XD351XL-CD80	193.5	1549.32
36	XD361XL-CD80	193.6	1548.51
37	XD371XL-CD80	193.7	1547.72
38	XD381XL-CD80	193.8	1546.92
39	XD391XL-CD80	193.9	1546.12
40	XD401XL-CD80	194.0	1545.32
41	XD411XL-CD80	194.1	1544.53
42	XD421XL-CD80	194.2	1543.73

43	XD431XL-CD80	194.3	1542.94
44	XD441XL-CD80	194.4	1542.14
45	XD451XL-CD80	194.5	1541.35
46	XD461XL-CD80	194.6	1540.56
47	XD471XL-CD80	194.7	1539.77
48	XD481XL-CD80	194.8	1538.98
49	XD491XL-CD80	194.9	1538.19
50	XD501XL-CD80	195.0	1537.40
51	XD511XL-CD80	195.1	1536.61
52	XD521XL-CD80	195.2	1535.82
53	XD531XL-CD80	195.3	1535.04
54	XD541XL-CD80	195.4	1534.25
55	XD551XL-CD80	195.5	1533.47
56	XD561XL-CD80	195.6	1532.68
57	XD571XL-CD80	195.7	1531.90
58	XD581XL-CD80	195.8	1531.12
59	XD591XL-CD80	195.9	1530.33
60	XD601XL-CD80	196.0	1529.55
61	XD611XL-CD80	196.1	1528.77

## FUNCTIONAL DIAGRAM

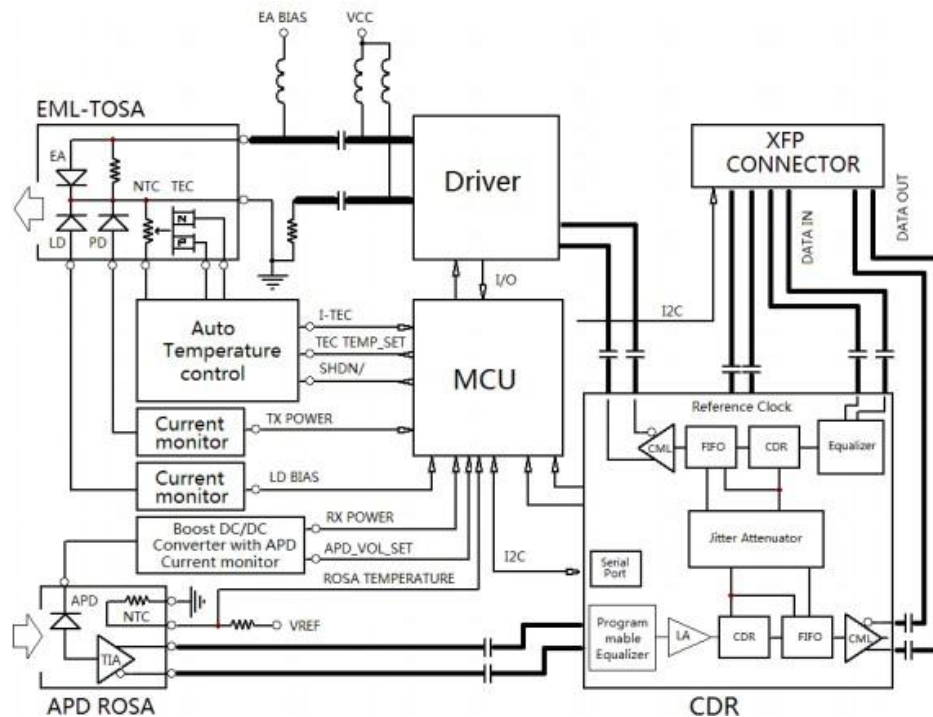



HuiGoo Optic Co., Limited

sales@huigooptic.com

## ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	Vcc	-0.5	4.0	V	
Storage Temperature		-40	85	°C	
Relative Humidity			85	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module

## GENERAL OPERATING CHARACTERISTICS

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Data Rate	Ethernet		10.3125		Gb/s	
	Fiber Channel		10.518			
Supply Voltage	Vcc	3.13	3.3	3.47	V	
	Vcc				V	
Supply Current	Icc <sub>s</sub>				mA	
	Icc <sub>3</sub>			550	mA	
Operating Case Temp.	Tc	0		70	°C	

## ELECTRICAL INPUT/OUTPUT CHARACTERISTICS

### ● Transmitter

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Diff. input voltage swing		120		820	mVpp	1
Tx Disable input	H	VIH	2.0	Vcc+0.3	V	
	L	VIL	0	0.8		
Tx Fault output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.8		
Input Diff. Impedance	Zin		100		Ω	

● Receiver

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Diff. output voltage swing		340	650	800	mVpp	3
Rx LOS Output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.8		

Note 1) TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note 2) Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and Vcc+0.3V.

Note 3) RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

## OPTICAL CHARACTERISTICS

● Transmitter

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Operating Wavelength			XX		nm	4
Ave. output power (Enabled)	Po	0		5	dBm	1
Extinction Ratio	ER	9			dB	1
RMS spectral width	$\Delta\lambda$			0.45	nm	
Rise/Fall time (20%~80%)	Tr/Tf			45	ps	2
Optical modulation amplitude	OMA			-2.8	dBm	
Dispersion penalty				3.9	dB	
Output Optical Eye	IEEE 802.3-2005 Compliant					

● Receiver

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Operating Wavelength		1270		1600	nm	
Receiver Sensitivity 9.95~10.3125Gb/s [1]	Rsen1			-24	dBm	3
Receiver Sensitivity 10.5~11.1Gb/s [1]	Rsen2			-23	dBm	
Min. overload	Pimax	-7			dBm	
LOS Assert	Pa	-32			dBm	
LOS De-assert	Pd			-25	dBm	
LOS Hysteresis	Pd-Pa	0.5		4	dB	


Note 1) Measured at 10.3125b/s with PRBS 2<sup>31</sup> - 1 NRZ test pattern.

Note 2) 20%~80%

Note 3) Under the ER worst case, measured at 10.3125 Gb/s with PRBS 2<sup>31</sup> - 1 NRZ test pattern for BER < 1x10<sup>-12</sup>

Note 4) If there is DWDM Product ,the wavelength XX -- CH17-61

## PIN DEFINITIONS AND FUNCTIONS

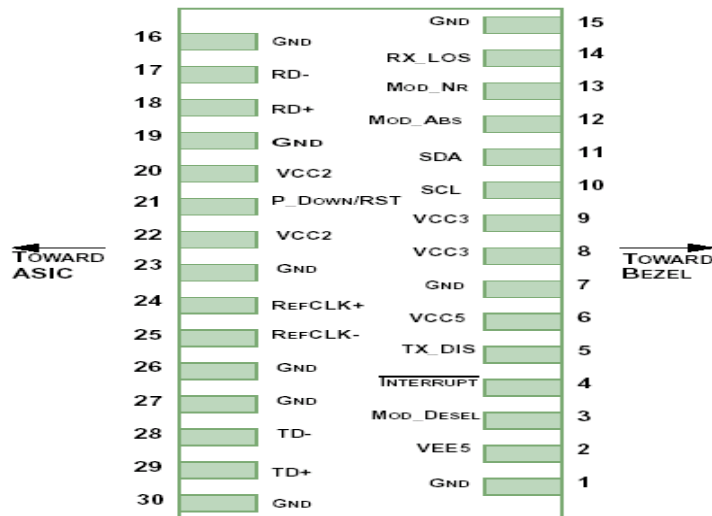

PIN #	Name	Function	Name/Description	Notes
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not required)	
3	LVTTTL-I	MOD_DESEL	Module De-select; When held low allows the module to respond to 2-wire serial interface	
4	LVTTTL-O	INTb	Interrupt; Indicates presence of an important condition which can be read via the 2-wire serial interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Turns off transmitter laser output	
6		VCC5	+5V Power Supply (Not required)	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL-I/O	SCL	2-Wire Serial Interface Clock	2
11	LVTTTL-I/O	SDA	2-Wire Serial Interface Data Line	2
12	LVTTTL-O	MOD_Abs	Indicates Module is not present. Grounded in the Module	2
13	LVTTTL-O	MOD_NR	Module Not Ready; Indicating Module Operational Fault	2
14	LVTTTL-O	RX_LOS	Receiver Loss Of Signal Indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RDN	Receiver Inverted Data Output	
18	CML-O	RDP	Receiver Non-Inverted Data Output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply (Not required).	

21	LVTTTL-I	P_DOWN/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode.	
21	LVTTTL-I	P_DOWN/RST	Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply (Not required)	
23		GND	Module Ground	1
24	PECL-I	REFCLKP	Not used, internally terminated to 50ohm (100ohm diff).	3
25	PECL-I	REFCLKN	Not used, internally terminated to 50ohm (100ohm diff).	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TDN	Transmitter Inverted Data Input	
29	CML-I	TDP	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1

**Notes:**

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. Reference Clock input is not required.

## TYPICAL INTERFACE CIRCUIT



